

NAHE

NEW ALUMINIUM HEAT EXCHANGER

MADE IN ITALY

A new line of **heat exchangers**
looking to the **future**



Designed and produced by



CESTARO FONDERIE®
ALUMINIUM SAND CASTINGS

DOMESTIC HEAT EXCHANGERS

NAHE heat exchanger is available for domestic condensing boilers in the range of 25kW and 35kW. Versions suitable for wall hung application. Low water side pressure drop.

Domestic Heat Exchangers	25	35
Nominal input CH	25	35
Nominal input DHW	30	40
Power modulation	Up to 1:10*	Up to 1:10*
CE efficiency Qn (60/80°C)	97%	97%
CE efficiency Qn (30/50°C)	107%	107%
CE efficiency Q30% (30°C return)	108%	108%
ErP compliant / Class	YES/A	YES/A
Water working pressure	0,5-6 bar	0,5-6 bar
Max flow temperature	95°C	95°C
Dimensions (Height-Width-Depth)	240x260x120 mm	270x260x120 mm



Domestic Heat Exchangers	20C	25C
Nominal input CH	20	25
Nominal input DHW	25	30
Power modulation	Up to 1:10*	Up to 1:10*
CE efficiency Qn (60/80°C)	97%	97%
CE efficiency Qn (30/50°C)	107%	107%
CE efficiency Q30% (30°C return)	108%	108%
ErP compliant / Class	YES/A	YES/A
Water working pressure	0,5-6 bar	0,5-6 bar
Max flow temperature	95°C	95°C
Dimensions (Height-Width-Depth)	310x175x160 mm	325x175x190 mm



SMALL COMMERCIAL HEAT EXCHANGERS

NAHE heat exchanger is available for small commercial condensing boilers in the range of 60kW and 80kW. Versions suitable for wall hung or floor cascade application. Low water side pressure drop.

Domestic Heat Exchangers	60	80
Nominal input CH	60	80
Power modulation	Up to 1:10*	Up to 1:10*
CE efficiency Qn (60/80°C)	97%	97%
CE efficiency Qn (30/50°C)	107%	107%
CE efficiency Q30% (30°C return)	108%	108%
ErP compliant / Class	YES/A	YES/A
Water working pressure	0,5-6 bar	0,5-6 bar
Max flow temperature	95°C	95°C
Dimensions (Height-Width-Depth)	400x300x160 mm	445x385x175 mm



COMMERCIAL HEAT EXCHANGERS

NAHE heat exchanger is available for commercial condensing boilers in the range of 100kW,120kW and 150kW. Versions suitable for wall hung application or floor cascade application. Low water side pressure drop.

Domestic Heat Exchangers	100	120	150
Nominal input CH	100	120	150
Power modulation	Up to 1:10*	Up to 1:10*	Up to 1:10*
CE efficiency Qn (60/80°C)	97%	97%	97%
CE efficiency Qn (30/50°C)	107%	107%	107%
CE efficiency Q30% (30°C return)	108%	108%	108%
ErP compliant / Class	YES/A	YES/A	YES/A
Water working pressure	0,5-6 bar	0,5-6 bar	0,5-6 bar
Max flow temperature	95°C	95°C	95°C
Dimensions (Height-Width-Depth)	510x425x215 mm	515x455x175 mm	540x490x225 mm



*depending on gas mixer/gas valve/gas burner **ASME certified company**

INNOVATIVE HEATING



TOP PERFORMANCES



LOW COST



LOW EMISSIONS



HIGH QUALITY



ENVIRONMENTAL FRIENDLY



COMPLETE RANGE



FREE TO MARKET



COMPACT AND LIGHT



360°

SEE NOW




NAHE BY CESTARO FONDERIE S.P.A.

VIA DELL' ARTIGIANATO 34 - 36050 BRESSANVIDO (VICENZA) ITALY

TEL . +39 0444460400 E-MAIL INFO@FONDERIECESTARO.IT

WWW.FONDERIECESTARO.IT | WWW.NAHE-CF.IT



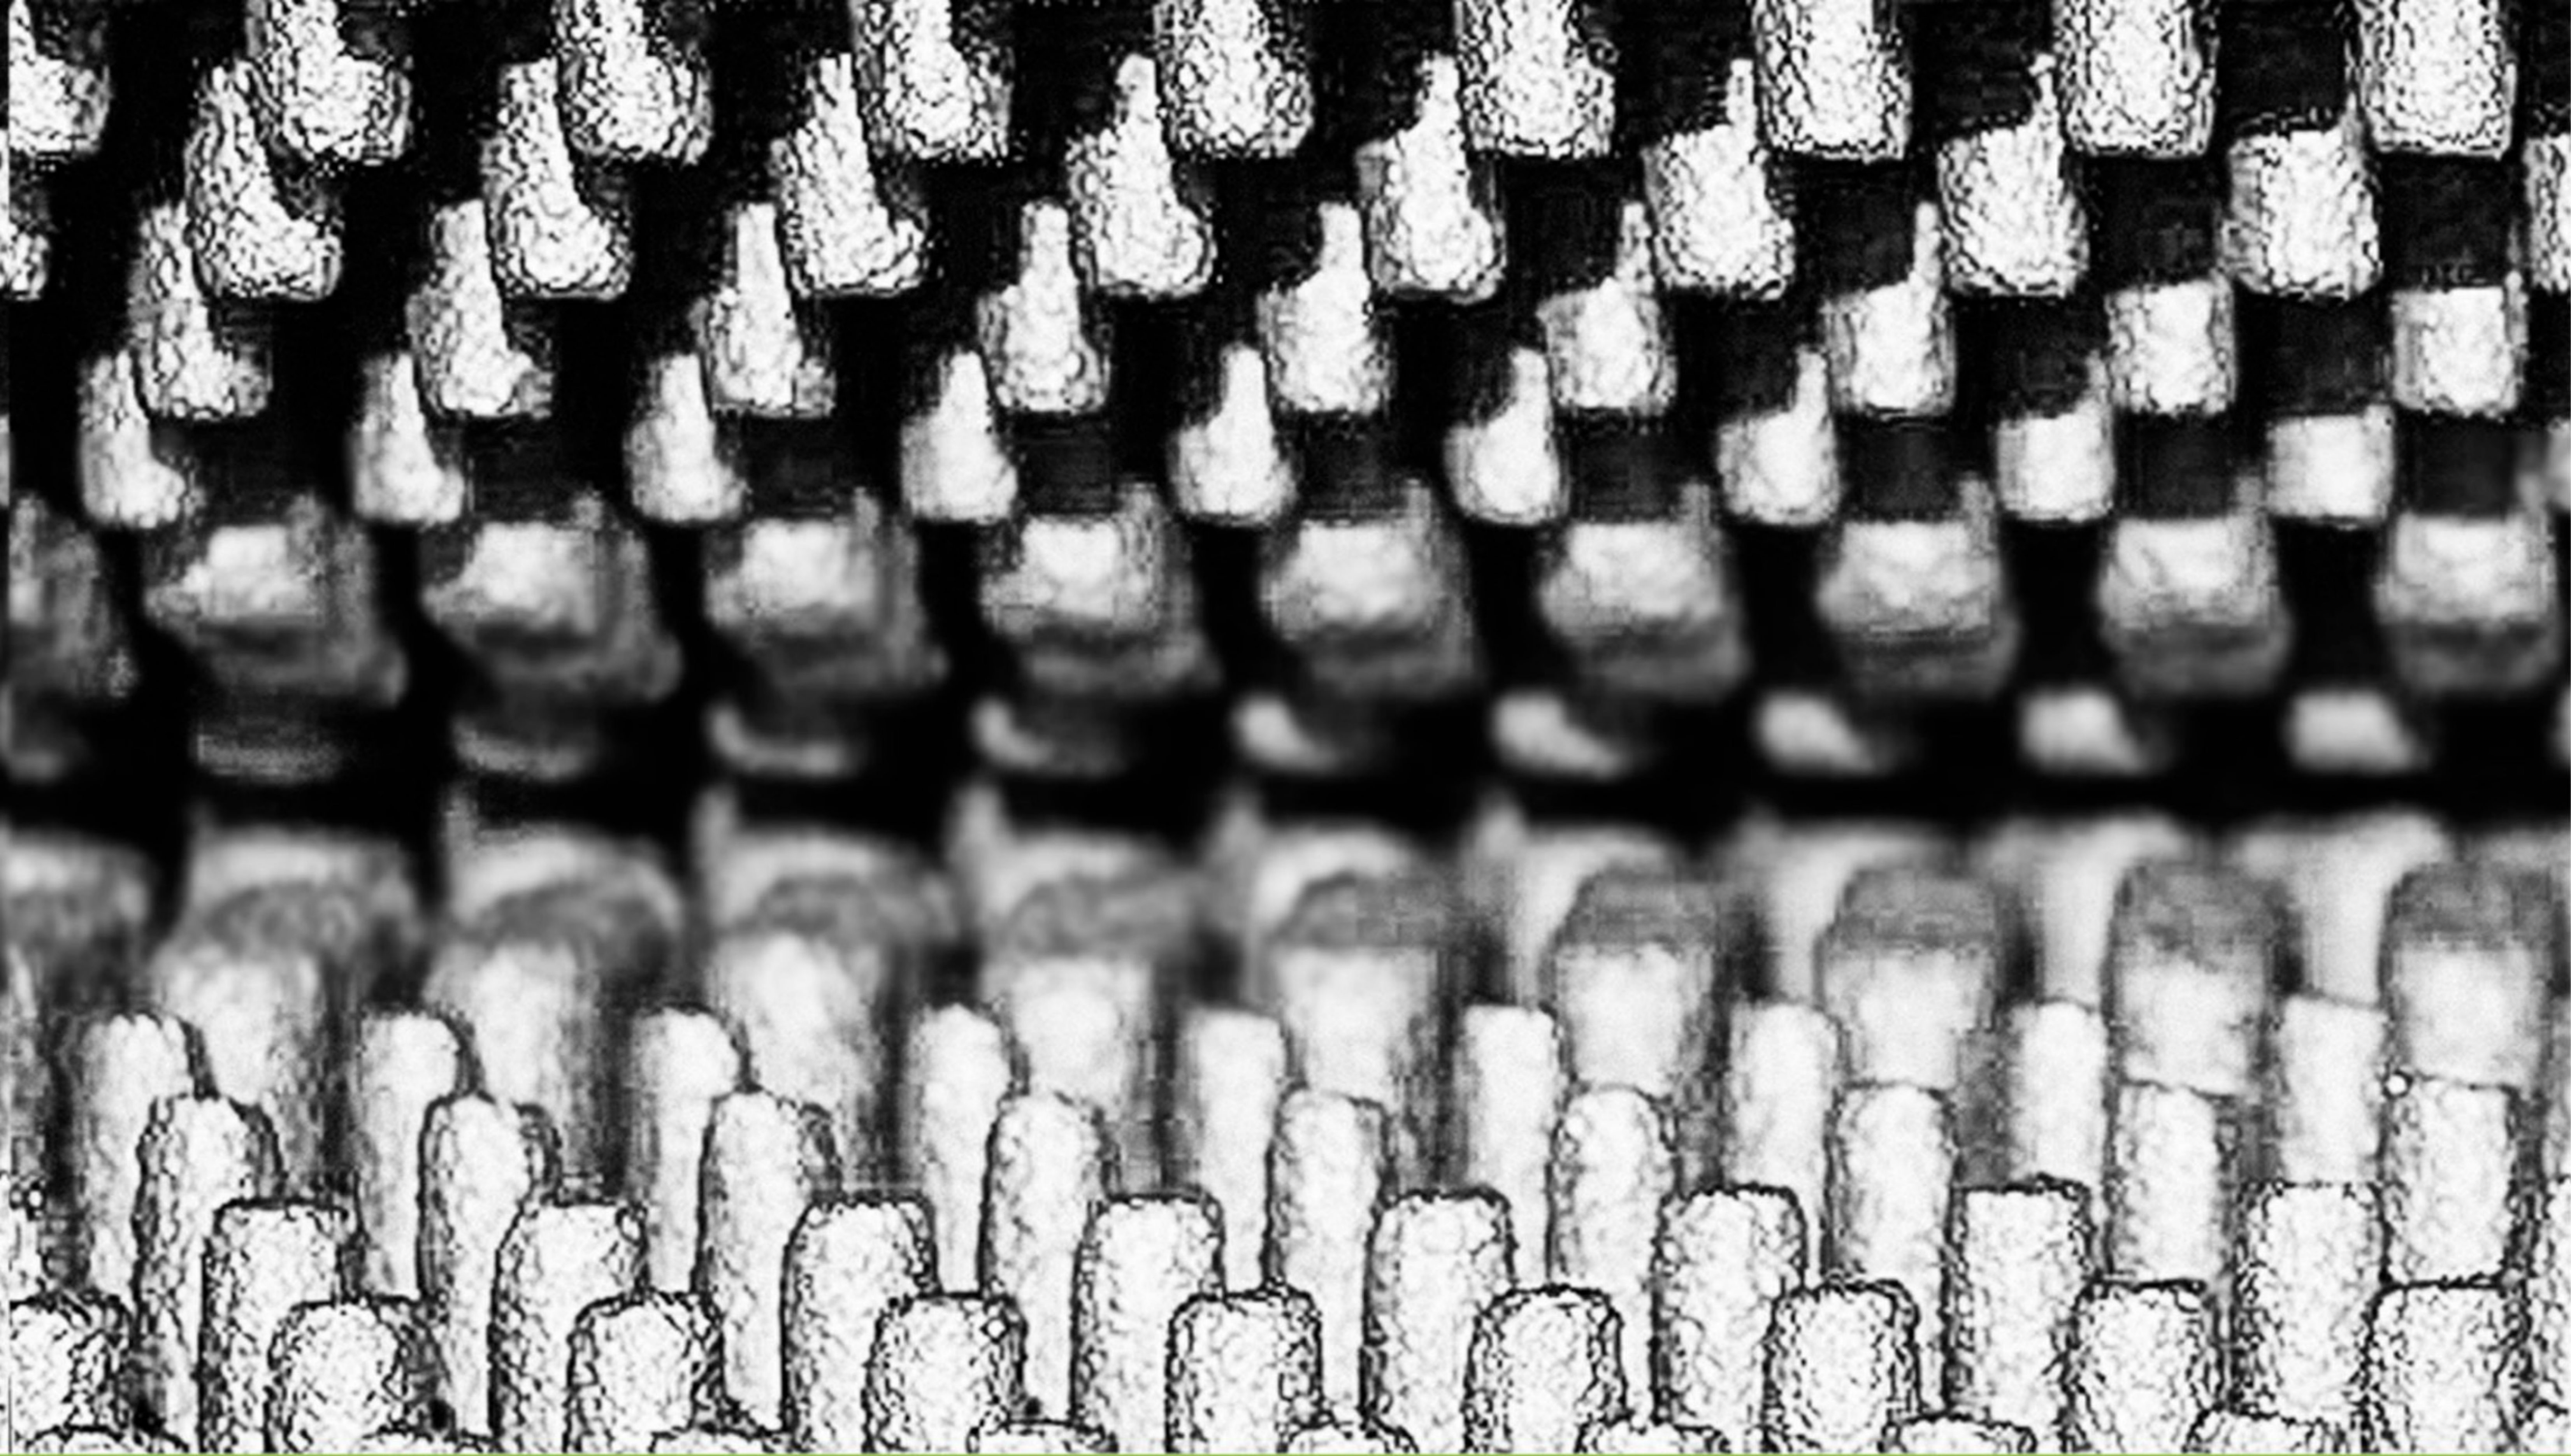

NHE

NEW ALUMINIUM HEAT EXCHANGER

MADE IN ITALY



CESTARO FONDERIE®
ALUMINIUM SAND CASTINGS

